

MAN L16/24




缸径：160 mm，冲程：240 mm

转速	r/min	1,200	1,000		
频率	Hz	60	50		
		柴油机功率/kW	发电机功率/kW*	柴油机功率/kW	发电机功率/kW*
5L16/24		500	475	450	428
6L16/24		660	627	570	542
7L16/24		770	732	665	632
8L16/24		880	836	760	722
9L16/24		990	941	855	812

尺寸

气缸数		5	6	7	8	9
	r/min	1200/1000	1200/1000	1200/1000	1200/1000	1200/1000
A	mm	2,807	3,082	3,557	3,832	4,107
B	mm	1,400	1,490	1,585	1,680	1,680
C	mm	4,207	4,572	5,142	5,512	5,787
H	mm	2,337	2,337	2,415/2,337	2,415	2,415
干重	t	9.5	10.5	11.4	12.4	13.1

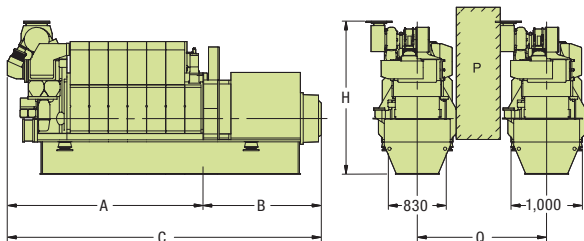

注：具体尺寸根据具体电机型号确定，以上尺寸仅供参考。

Note: The above dimension: only reference.

The final dimensions are determined by the type of generator.

*基于电机效率为95%，具体机组功率由发电机效率决定。


*Based on nominal generator efficiencies of 95%.



L16/24

Tier II

- 结构 Configuration: 直列In-line
缸径 Bore: 160 mm
冲程 Stroke: 240 mm
转速 Speed: 1000/1200 rpm
活塞速度 Piston speed: 8/9.6m/sec
平均有效压力 Mean eff.press.:
5 cyl.engine :22.4/20.7 bar
6,7,8,9 cyl.engine:23.6/22.8bar
最大燃烧压力 Max.combust.press.: 170bar
燃油 Fuel quality: ISO RMK700

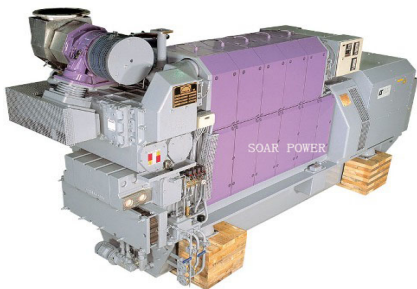

P柴油机之间的自由通道, 宽600 mm高2000mm。

P Free passage between the engines, width 600 mm and height 2000 mm.

Q柴油机间隔的最小距离: 1800mm。

Q~Min.distance between centre of engines: 1800mm.



URL: <http://www.soar.hk>

E-mail: sale@soar.hk

Phone: +86-4008111308