

# ZCP Generator Sets Specification

## 6210ZLD

Bore 210 mm, Stroke 290 mm

### Main Data

Speed	750 rpm		720 rpm	
Frequency	50 Hz		60 Hz	
<b>Model</b>	<b>Genset. kW</b>	<b>Engine. kW</b>	<b>Genset. kW</b>	<b>Engine. kW</b>
600GF	600	662	600	662
550GF	-	-	550	662
500GF	500	551	-	-


Based on alternator efficiency of 95%.

### Specific Consumption

100% Load	Unit	
Fuel Oil Consumption	g/kWh	190
Lube oil consumption	g/kWh	0.7

### Dimensions & Weight

Cyl. No.	Dimensions (mm) <sup>1)</sup>			Dry Mass (ton) <sup>2)</sup>
	L	B	H	Genset <sup>1), 3)</sup>
600GF	5,287	1,496	1,643	16
550GF	5,142	1,496	1,643	16
500GF	5,207	1,496	1,643	16

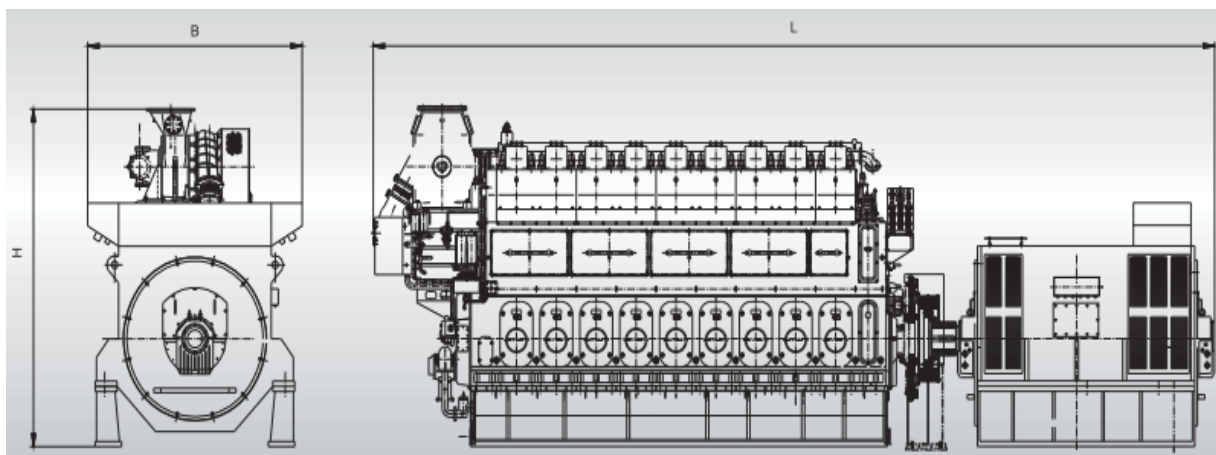

### Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project.

URL: <http://www.soarpower.com>

E-mail: [sale@soarpower.com](mailto:sale@soarpower.com)

Phone: +86-4008111308